

# CyBox RT 3-W

RAILWAY ROUTER WITH 5G AND WI-FI 5 WAVE 2

# WESTERMO



MADE  
IN  
GERMANY

## KEY FEATURES

- Up to two 5G interfaces for channel-bundled WAN access
- Up to 4 SIM cards for each 5G interface
- Optional Wave 2 interface with 4x4 MU-MIMO with up to 1733 Mbps
- Dual 1 Gigabit Ethernet on M12 X-coded connectors
- Power over Ethernet (PoE+) according to IEEE 802.3at
- Ultra-wide-range power supply 24 to 110 VDC
- Integrated GNSS
- Built-in cyber security
- Maintenance-free design
- -40 °C to +70 °C operating temperature
- EN 50155 compliant

## TYPICAL APPLICATIONS

- Passenger Wi-Fi
- Passenger Entertainment
- Passenger Information
- Train-to-Ground Communication

## HIGH-END WIRELESS COMMUNICATION

The CyBox RT 3-W is a member of the CyBox family – robust wireless communication routers for railway applications. It offers stable, secure, and broadband 5G/LTE connections for train-to ground communication and high-speed internet. The device hosts up to two 5G interfaces for parallel 5G channel use and thus maximized throughput or one Wave 2 interface combined with an 5G interface to boost network efficiency and connect to client devices such as mobile phones. Country-specific 5G/LTE/Wi-Fi standards are adopted for worldwide use in every type of train.

## BACKBONE CONNECTIVITY

On the fixed network side, the access point features two 1 Gigabit Ethernet ports and higher bandwidth options to create a faster backbone.


## MULTIPLE POWER OPTIONS

The CyBox RT 3-W provides flexible powering options by either an internal power supply or Power-over-Ethernet (PoE+). The PoE daisy chaining offers wireless connectivity with two routers using just one cable – a noticeable cost saving factor especially in retrofit programs.

## USER-INTERFACE AND SECURITY FEATURES

The CyBox RT 3-W firmware provides a convenient management interface via a web service. Besides global setup parameters the open source software OpenWrt allows the configuration of the radio interfaces, including provider information and the login dialog, as well as the setup of the stateful firewall. The access point and router configurations as well as the management firmware can be updated remotely. Furthermore, the built-in fully configurable stateful firewall and multi-VPN support with hardware-accelerated encryption ensures communication security.

## BLOCK DIAGRAM

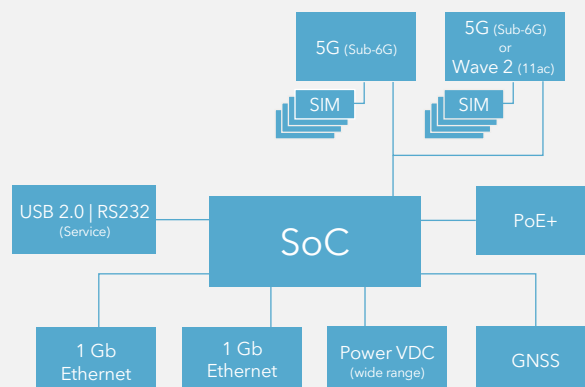

# CyBox RT 3-W

RAILWAY ROUTER WITH 5G AND WI-FI 5 WAVE 2

# WESTERMO

## TECHNICAL DATA

| PHYSICAL INTERFACES |   |
|---------------------|---|
| System Architecture | Dual-Core CPU T1023, 1200 MHz<br>1 GB RAM, 128 MB Flash |
| Software            | Linux OS OpenWrt  |
| Antenna             | QLS connectors  |
| LAN                 | 2x 10/100/1000BaseT(X), M12 X-coded                     |
| USB/Serial Port     | M12 8-pin female A-coded, USB 2.0, RS232                |
| Power Input         | M12 4-pin male A-coded                                  |
| Reset Switch        | available on front panel                                |

| ELECTRICAL SPECIFICATIONS       |   |
|---------------------------------|---|
| Power Supply                    | 24 to 110 VDC, wide-range power supply<br>(compliant to EN 50155) |
| Power over Ethernet             | PoE+, Class-4 powered device, IEEE 802.3at                        |
| Interruptions of Voltage Supply | EN 50155, Class S2  |
| Power Consumption               | 20 W typ., 25 W max.  |

| ENVIRONMENTAL CONDITIONS |   |
|--------------------------|---|
| Ambient Temperature      | depending on temperature class of Wi-Fi module<br>Class OT4, -40.. +70 °C (85 °C) operating or<br>Class OT3, -25.. +70 °C (85 °C) operating<br>-40.. +85 °C storage |
| Humidity                 | max. 95 % non-condensing operating and storage  |
| Altitude                 | Class AX, up to +2000 m   |
| PCB Protection           | conformal coating   |

| RELIABILITY     |  |
|-----------------|--|
| MTBF            | approx. ~260.000 h (acc. to IEC 62380)   |
| Mission Profile | 40 °C ambient temperature, 75 % working time<br>ratio with 365 days annual cycle |

| MECHANICAL SPECIFICATIONS |  |
|---------------------------|--|
| Dimensions                | 105 (130) mm x 70 mm x 204 mm (w h d)<br>(incl. mounting points) |
| Weight                    | up to 1850 g   |
| Housing                   | IP40, aluminum, wall-mount, conductive cooling                   |

## OPTIONS

|  |   |
|--|---|
| Modules  | various combinations of Wi-Fi and 5G/LTE<br>modules |
| Antenna Connectors   | QLS to SMA adapter                                  |
| Order numbers on standard configuration sheet and <a href="http://www.eltec.com">www.eltec.com</a> |   |

## MODULES

| 5G INTERFACE   |   |
|----------------|---|
| Transfer Rates | up to 2.4 Gbps download / 500 Mbps upload   |
| 5G             | n1, n2, n3, n5, n7, n8, n12, n20, n28, n38, n40, n41,<br>n48, n66, n71, n77, n78, n79   |
| 4G (LTE) Bands | B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18,<br>B19, B20, B25, B26, B28, B29, B30, B32, B34, B38,<br>B39, B40, B41, B42, B43, B48, B66, B71 |
| 3G Bands       | B1, B2, B3, B4, B5, B8  |
| Antenna        | 4x RF antennas, with Diversity and Massive-MIMO   |

| WI-FI INTERFACE IEEE 802.11 a/b/g/n/ac/ac Wave 2 |   |
|--|---|
| Transfer Rates                                   | up to 1733 Mbps   |
| Frequency Range                                  | 2.412 GHz to 2.484 GHz, or 5.180 GHz to 5.825<br>GHz, selectable band |
| RF   | 4x RF antennas, 4x4 MU-MIMO technology                                |
| Encryption                                       | AES, TKIP, WPA, WPA2, WPA3  |
| Operational Feature                              | up to 256 clients per radio   |
| Security   | stateful firewall with multi-level client isolation                   |

| GNSS INTERFACE     |  |
|--------------------|--|
| Frequency Band     | GPS (L1), GLONASS (L1, FDMA), Galileo (E1)<br>ready, Beidou, QZSS constellations |
| Protocol Standards | NMEA, RTCM 104   |
| Accuracy           | up to 1.5 m  |
| Time To First Fix  | cold start < 35 s, warm start 1 s  |

## STANDARDS AND SPECIFICATIONS

|                            |                                |
|----------------------------|--------------------------------|
| Directive (EU)<br>2016/797 | EN 50155 (IEC 60571)           |
|                            | EN 45545-2 (HL 1 to HL 3)      |
|                            | EN 61373 (Category 1, Class B) |
| RED - 2014/53/EU           | EMC                            |
|                            | radio spectrum                 |
|                            | health & safety                |

## EVALUATION KIT

| ORDER NO.  | DESCRIPTION  |
|--|--|
| EVRTW-3011V0   | based on model CYRTW-3011V0<br>2x 5G, 2x 1 Gb ETH (M12X), PoE+, GNSS |
| All kits incl. antennas, adapters, cables and power supply in ruggedized<br>suitcase |  |